


# VREDO STRONG IN TRAC- TECHNIC

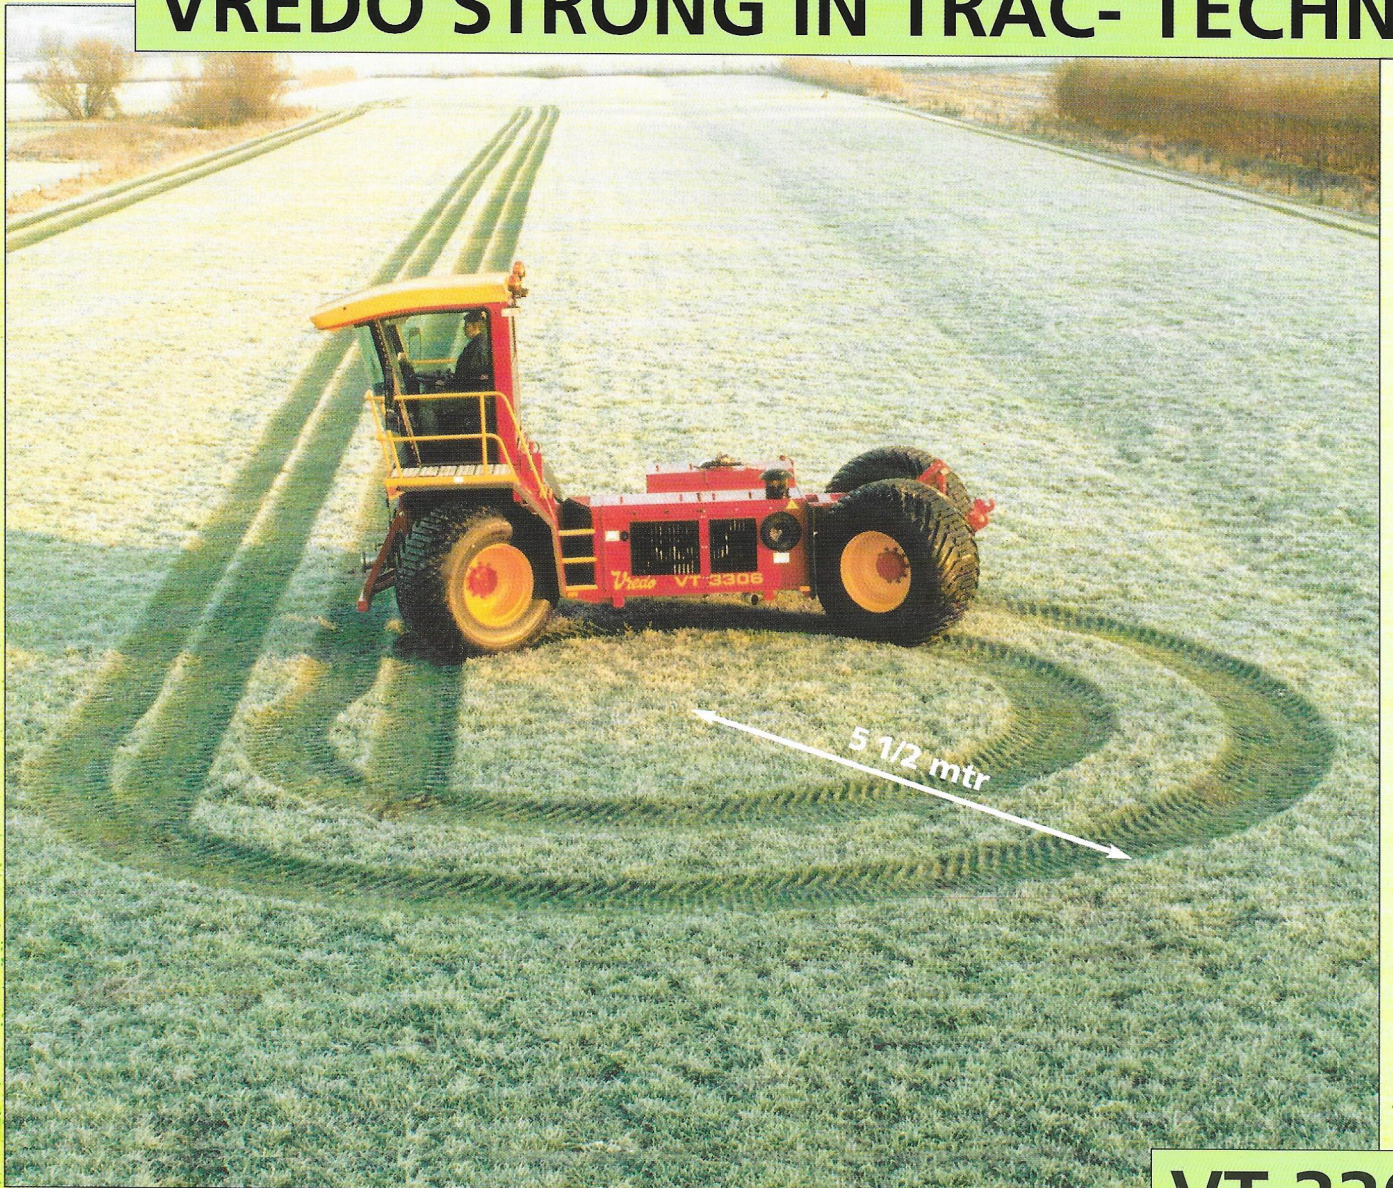

**VT 3306**

**Vredo**

technical data **VREDO TRAC VT 3306:**

engine	Deutz diesel BF 6M 1015 power 240 kW / 330 hp rated speed 2300 rpm cylinders 6 max. torque 1500 Nm
transmission	hydraulic speed stepless 0-13(18) and 0-25(40) kmh mechanical transfer diff lock on front and rear axles
linkage	single and double acting lifting 7125 kg pushing 5575 kg
front linkage (option)	lifting 7830 kg pushing 9685 kg
pto-shaft (option)	front 1000 rpm left rear 1000 rpm right
external hydraulic optional:	2 double acting valves 1 extra double acting valve oil flow 55 ltr at 200 bar
tyres	Trelleborg 800/45-30,5 loader or Trelleborg 850/50-30,5 or Michelin 750/65R XM27
weight	8063 kg basic vehicle excl. preparation for slurry tanker 10570 kg with tanker 11,5 m <sup>3</sup> incl. pump, filter, suction arm, etc
dimensions (on tyres 850 x 30,5	length 6030 mm width 2980 mm height 1550 mm platform height 3600 mm cabin/tanker wheelbase 4360 mm turning circle 11000 mm (outer diam.)
hydraulic for add-on tanker etc. (option)	pump 55 ltr/min at 200 bar 6 double acting valves 2 single acting valves power unit 108 kW / 146 HP (in)dependent to forward speed

information: **VREDO Dodewaard bv**  
Welysestraat 25a tel. -31-488 411254  
NL-6669 DJ Dodewaard fax. -31-488 412471

dealer: